

suitable for 4-8 inch ceiling installation speakers with a maximum installation height of 165 mm!




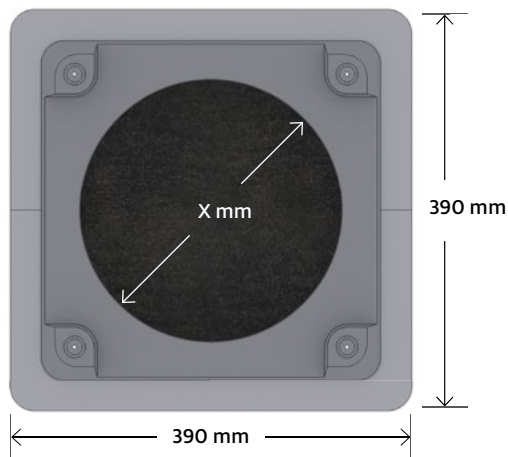


Image showing the maximum possible round cutout

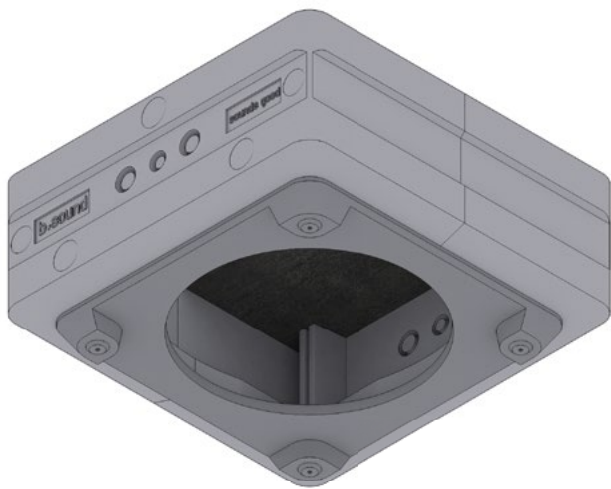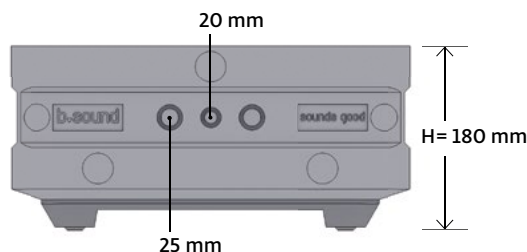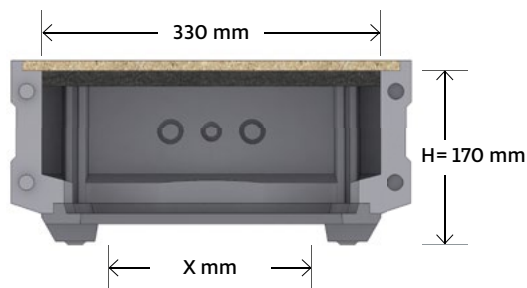

Description

Concrete ceiling installation box euroboxx®
Ceiling installation backbox with EPS body and MFP backlid.

Features and benefits

- two side cut-outs allow for best possible handling of electronic ductwork (20 mm + 25 mm)
- lightweight yet robust stability with excellent shock absorption features compared to other systems
- our materials deliver a better audio reproduction when compared to other boxes that come in wood, sheet metal or plastic
- better insulation with airborne- and structure-borne noise compared to conventional in-wall systems
- includes aluminum nails for easy fixing
- Inside equipped with acoustic insulation material 20 mm

Included in delivery (per piece)

- 1 euroboxx L (II-150) in EPS grey, 50kg/m³ with glued in MFP-lid
- 1 universal adapter in EPS/PE anthracite 50 kg/m³
- 1 positioning-cube in EPS/PE anthracite 50 kg/m³
- 1 EPS/PE adapter ring white 15kg/m³
- 3 burnished steel nails 3,2 × 40 mm with big plastic lid
- 2 zinc-coated steel nails 3,5 × 60 mm
- 4 aluminum nails 4,5 × 205 mm
- 1 installation manual
- 1 cardboard packaging

Typ	euroboxx L (II-150)
Item number	10132
Dimensions	390 × 390 × 180 mm (L × W × H)
Depth	165 mm
Cut-Out-Dimensions X	circular: max. 280 mm square: 240 × 240 mm
Internal Volume	13,50 l
Fire protection class	B1
Pallet unit	54 Pieces



Video installation guide
<http://b-sound.ch/euroboxx-qr>